


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

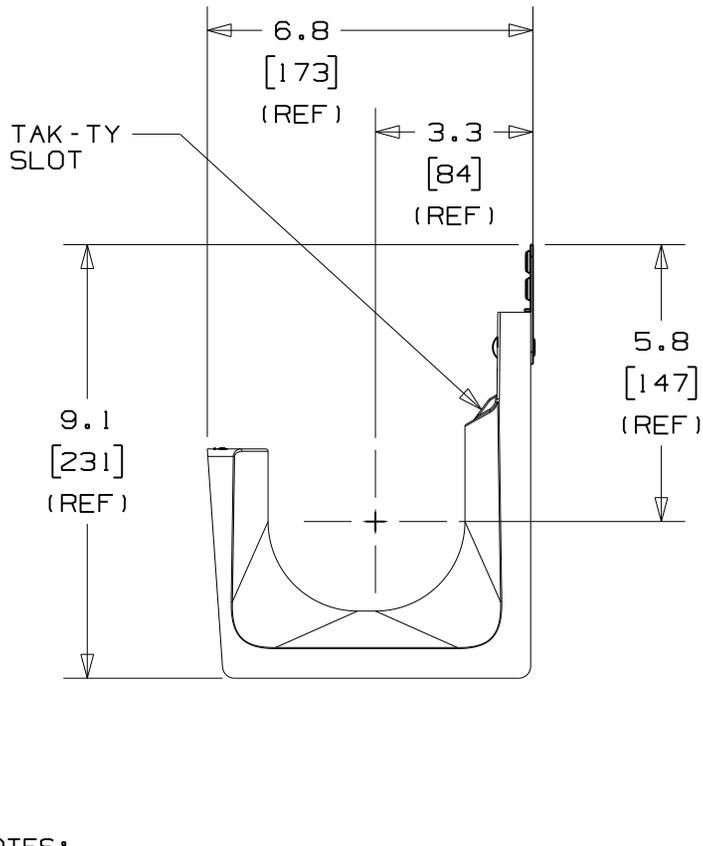


2.6 [67] (REF)

.180  $\phi$  [4.57] (REF)

.265  $\phi$  [6.73] (REF)

PANDUIT PART NO.	WEIGHT lbs 10 (g) pcs
JP4WP2B- ---	4.42 (2009)

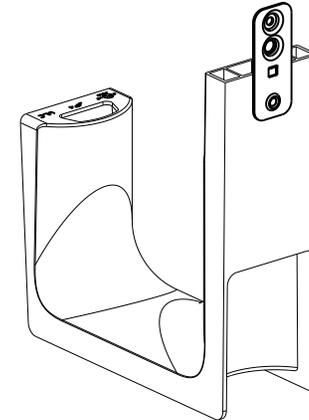

- NOTES:
- SEE CURRENT PRICE SHEET FOR PART NUMBER SUFFIX DESIGNATION FOR PACKAGE SIZE AND PRODUCT COLOR.
  - HOOK MATERIAL: NYLON 6/6  
PLATE MATERIAL: PRE-GALVANIZED STEEL  
RIVET MATERIAL: ALUMINUM
  - PRODUCT IS DESIGNED TO SUPPORT A MAXIMUM OF 4.0" (101.6) DIAMETER BUNDLE. MAXIMUM RECOMMENDED STATIC LOAD: 100 lbs.
  - PRODUCT INCORPORATES FEATURES ALLOWING USER TO RETAIN CABLE BUNDLES IN J-PRO J-HOOK WITH TAK-TY CABLE TIES UP TO 3/4" WIDE.
  - PRODUCT MARKINGS:  
cULus logo and statement:  
"SUITABLE FOR USE IN AIR HANDLING SPACES IN ACCORDANCE WITH SECTION 300-22 (C) & (D) OF THE NATIONAL ELECTRIC CODE IN SINGLE UNIT CONFIGURATION ONLY, FOR USE INDOORS"  
ULC logo and statement:  
"LISTED IN ACCORDANCE WITH CAN/ULC S-102.2-10 MOUNTED IN SINGLE UNITS, MINIMUM SPACING OF 4ft (1220mm) BETWEEN MOUNT POINTS. FSR=0, SDC=35"

TITLE J-PRO J-HOOK WITH PLATE FOR POWDER ACTUATED FASTENERS (JP4WP2B- ---) CUSTOMER DRAWING		<b>PANDUIT</b> <sup>TM</sup>
ITEM REVISION NAME 121031AH/00	MATERIAL: SEE NOTE 2	
DATASET FILE NAME 121031AH_DC_C11007/00A		DRAWING NUMBER: C11007
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN (mm) .x : .1 (2.54) .xxx : .005 (0.127) .xx : .01 (0.25) ANGLES : 5 °		
THIRD ANGLE PROJECTION		
DRAWN BY DBLA	DATE 10/29/2012	CHK KLN
SCALE NONE		SIZE A
SHT 1 OF 1		

OO	10/29/2012	DBLA	GGC	KLN	INITIAL RELEASE	GAECN00226
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN

12101000A/12