UNCONTROLLED DOCUMENT


PART NUMBER

CLS-RC11A12250G


.06

REV.


REV.	E,C,N.	NUMBER	AND	REVISION	COMMENTS	DATE
Α	E.C.N.	#11148.			_	12.08.




CHARACTERISTICS				
RATING	25A AT 12VDC			
LED COLOR	GREEN			
CIRCUIT OPERATION	SPST			
NO. OF PINS	3			
SWITCH OPERATION	ON-OFF			

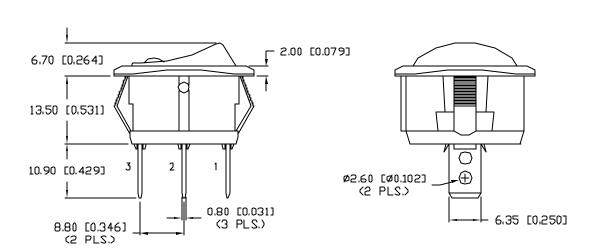

INTERNAL CIRCUIT



PANEL CUTOUT



**UNLESS DTHERWISE SPECIFIED TOLERANCES PER DECINAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN= +DECINAL PRECISION -0.001

REV. PART NUMBER CLS-RC11A12250G

ILLUMINATED ROCKER SWITCH, 25A AT 12VDC RATING, GREEN LED, GREEN DIFFUSED LENS.

CONFIDENTIAL INFORMATION
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF
LUMEX NO. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX
INC., THE HXIDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION
INC., THE HXIDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION. CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

RELIABILITY NOTE OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.



290 E. HELEN ROAD PALATINE, IL 60067—6976 PHONE: +1.847.359.2790 US WEB: www.lumex.com TW WEB: www.lumex.com.tw

DRAWN BY: CHECKED BY: APPROVED BY: DATE: 12.08.06 PAGE: 1 OF 1 SCALE: N/A JC