Thermofit Molded Parts Specification Control Drawing Limited Distribution

Part Number : 202C642-X-06 Description : UNI-BOOT



- 1. All dimensions are in $\frac{\text{Incres}}{[\text{millimeters}]}$
- 2. Dimensions appearing in table are as follows:
 - a As Supplied
 - b After Unrestricted Recovery
- 3. "S" & "T" dimensions apply to a minimum of 240° of circumference.

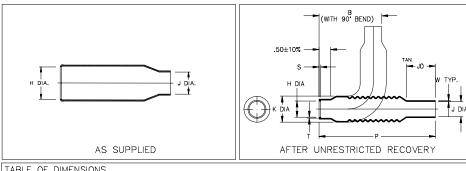


TABLE OF DIMENSIONS												
PART NUMBER	H Min a	Max	J Min a	Max b	K Max b	P ±10% b	JO ±10%	S ±.03	T ±.03	W Min b	B Nom b	FITS SHIELD ADAPTER ENTRY SIZES
	1.74	.88	1.44	.55	1,49	6.25	1.00	.07	.05	.027	3.08	
202C642-X-06	[44,2]	[22,3]	[36,5]	[14,0]		[158,7]	[25,4]	[1,8]	[1,3]	[0,6]	[78,2]	11 THRU 13

Revision: F Date: 3/3/99 Part Number: 202C642-X-06

Part Number: 202C642-X-06


Description : UNI-BOOT

Description : UNI-BOOT

Thermofit Molded Parts Specification Control Drawing Limited Distributi

imited D	istribution				
COMPATABILITY	CHART				
MATERIAL DASH NO.	MATERIAL DESCRIPTION	RT SPEC	COATING SLASH NO.	COATING S NO.	COATING DESCRIPTION
-50	Flexible VPB	RT-1313			
-51	Flexible EPB	RT-1321			
-71	Flexible Polyolefin	RT-1316			

COMPATABILITY CHART								
MATERIAL DASH NO.	MATERIAL DESCRIPTION	RT SPEC	COATING SLASH NO.	COATING S NO.	COATING DESCRIPTION			
-50	Flexible VPB	RT-1313						
-51	Flexible EPB	RT-1321						
-71	Flexible Polyolefin	RT-1316						

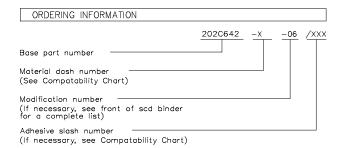

THIS DRAWING IS SUBJECT TO CHANGE WITHOUT NOTICE; CONSULT YOUR NEAREST FIELD REPRESENTATIVE FOR CURRENT REVISION

Raychem

RAYCHEM CORPORATION 300 CONSTITUTION DRIVE MENLO PARK, CALIFORNIA 94025

Revision : F Part Number : Date: 3/3/99

Description: UNI-BOOT

CAD FILE MP99050

202C642-X-06