NOTES:

I. MATERIALS AND FINISHES: BODY & CONTACT - BeCu, GOLD PLATING INSULATORS - PTFE, NATURAL RETAINER RING - BeCu, NICKEL PLATING

2. ELECTRICAL:

A. IMPEDANCE: 50 OHM

B. FREQUENCY RANGE: DC - 26.5 GHz

C. VSWR (RETURN LOSS): 1.20 MAX. (-20.8 dB MIN.) @ DC - 18 GHz 1.35 MAX. (-16.5 dB MIN.) @ 18 - 26.5 GHz

D. DIELECTRIC WITHSTANDING VOLTAGE: 500 VRMS, MIN.

3. MECHANICAL:

A. DURABILITY: 100 CYCLES MIN. WHEN MATED FULL DETENT JACK 500 CYCLES MIN. WHEN MATED LIMITED DETENT JACK IOOO CYCLES MIN. WHEN MATED A SMOOTH BORE JACK
B. TEMPERATURE RANGE: -65°C TO +165°C

C. MATING FORCES (PER DSCC #94007):

ENGAGEMENT: FULL DETENT: 15 LBS (67 N) MAX. LIMITED DETENT: 10 LBS (45 N) MAX. SMOOTH BORE: 2 LBS (9 N) MAX.

DISENGAGEMENT: FULL DETENT: 2 LBS (9 N) MIN. LIMITED DETENT: 2 LBS (9 N) MIN. SMOOTH BORE: 0.5 LBS (2.2 N) MIN. 4. PACKAGING:


A. QUANTITY: SINGLE PACK B. MARKING: BAG TO BE MARKED

"AMPHENOL RF, SMP-FS-C07-5, DATE CODE"


5. CABLE ASSEMBLY INSTRUCTIONS: A. SEE AMPHENOL SPEC 349-50685.

6> SHOWS CABLE ENTRY DIMENSIONS.

REVISIONS THIRD ANGLE PROJ. 🕀 🖯 REV DESCRIPTION DATE ECO APPR 08221 Α RELEASE TO MFG 30 - May - 18 BMG



SCALE 6.000

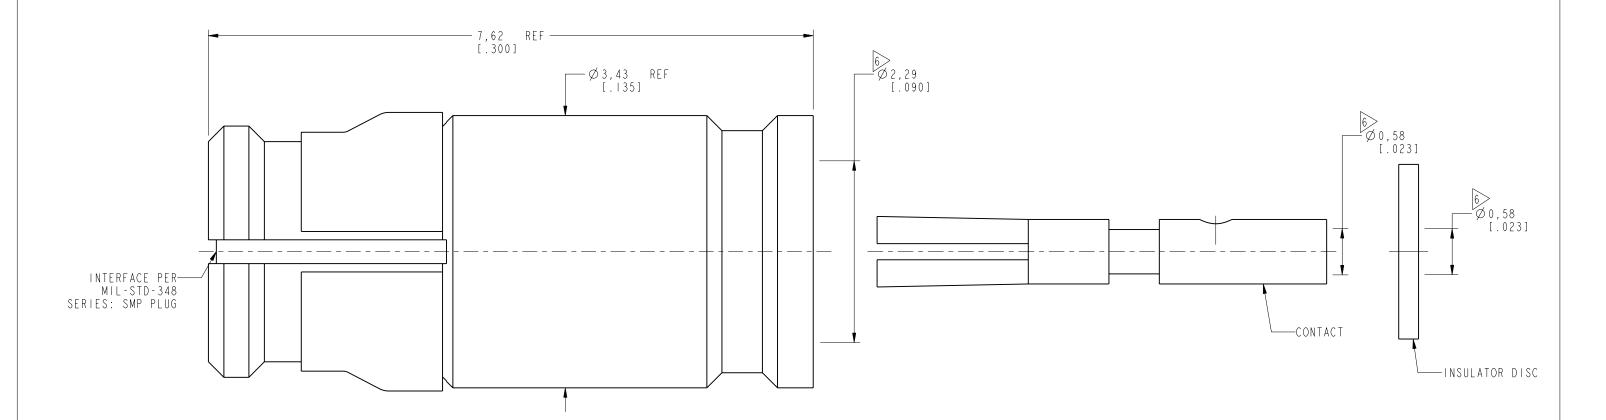

## **CUSTOMER OUTLINE DRAWING**

ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

| UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN METRIC AND TOLERANCES ARE:  <0.5mm  0.5 - 6mm  6 - 30mm  30 - 120mm  ANGLES  ±0.05mm  ±0.1mm  ±0.2mm  ±0.3mm  ±1°   | MATERIAL SEE NOTES                     | DRAWN<br>K.SONG       | DATE<br>02-Jun-18 | TITLE<br>SMP STR PLUG WITH                        | Amphenol RF             |
|---|--|-----------------------|-------------------|---|-------------------------|
| NOTICE - These drawings, specifications, or other data (I) are, and remain the property of Amphenol corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they           | SEE NOTES                              | ENGINEER<br>KARTHIK R | DATE<br>05-Dec-17 | ANTI-ROCK RING FOR RG405                          | www.amphenolrf.com      |
| are given by Amphenol Corp. the furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting | REFERENCE<br>EAR # 8016 AND SMP-FS-C07 | APPROVED<br>S.HSIEH   | DATE<br>05-Jun-18 | OR .086" SEMI RIGID  SCALE: 21.0:1.0 SHEET 2 OF 2 | DRAWING NO.SMP-FS-C07-5 |
| rights to permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to   | CONFIGURATION LEVEL: In Work           | CAD FILE              | 03-101-10         | DWG SIZE REV                                      | ITEM NO. SMP-FS-C07-5   |
| or disclosed by said drawings, specifications, or other data.   | FINISH                                 |                       |                   | B A   | PART NO. SMP-FS-C07-5   |