

Ethernet-based, Modular Media Converter Chassis

IE-PowerTray/18

B+B SMARTWORX

Powered by

ADVANTECH

www.advantech-bb.com



PRODUCT FEATURES

- Supports Fast Ethernet and Gigabit Ethernet
- Supports MiniMc, IE-MiniMc, Giga-MiniMc, IE-Giga-MiniMc and MiniMc-Gigabit media converters
- 18-slot chassis
- Modular, hot-swappable
- Extended temperature chassis
- AC power (single)

Your network is growing and many new access points, workstations, etc. are required. However, legacy equipment, along with your existing wiring infrastructure, must work with any new equipment you implement in your network. When installing multiple miniature media converters in the MiniMc family series, the IE-PowerTray/18 is the perfect solution.


The unmanaged IE-PowerTray/18, from B+B SmartWorx, allows you to easily and cost effectively connect multiple converters in one chassis, eliminating the need for individual AC power adapters. Rack mount capability allows you to install it securely.

ORDERING INFORMATION

MODEL NUMBER	DESCRIPTION
IE-PowerTray/18	
850-13086	18 slot ModularChassis

MECHANICAL DIAGRAM

(dimensions in inches)

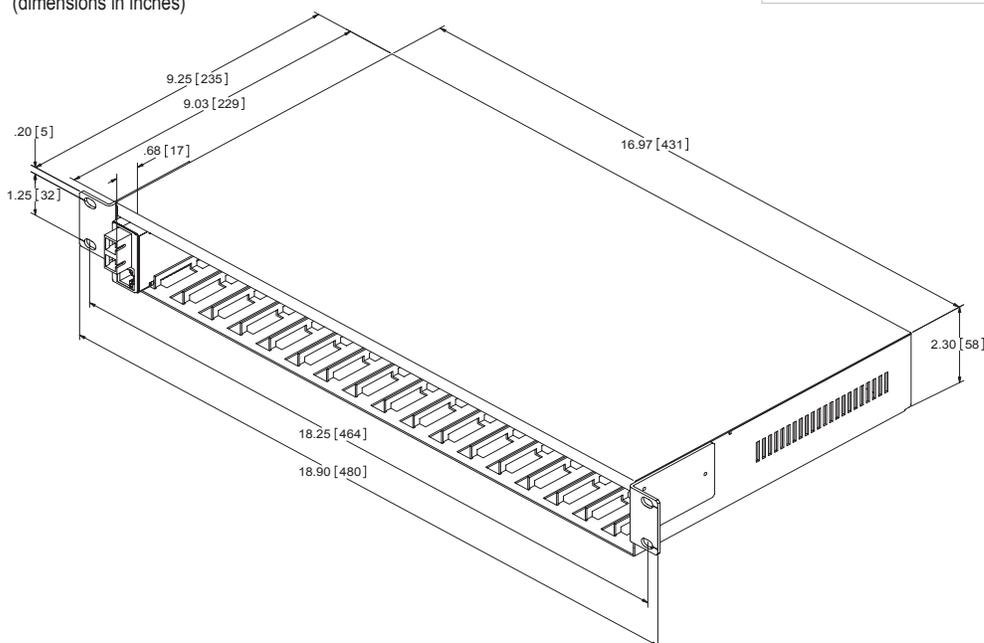

SPECIFICATIONS

TECHNICAL	
18 slot chassis can house the following modules: MiniMc series, including 10/100, gigabit, both IE and standard temperature versions	
Single AC power supply (included)	
Fits into a 19" rack; table top mounting.	
MECHANICAL	
Dimensions	2.30H x 16.97W x 9.25in D (5.80H x 43.10cm W x 23.5cm D)
Shipping Weight	10.0 lbs (4.5 kg)
POWER AC	
100-240 VAC, 1.5A max	
ENVIRONMENTAL	
Operating Temperature:	-13° to +158° F (-25° to +70° C)
Storage Temperature:	-13° to +158° F (-25° to +70° C)
Operating Humidity:	5% to 95% (non-condensing), 0-10,000 ft altitude)
REGULATORY APPROVALS	
FCC Class A, UL/CUL, CE, CSA	
UL/cUL, CSA, CE	
MEANTIME BEFORE FAILURE (MTBF)	
MTBF	150,422 hours

All product specifications are subject to change without notice.

IE-PowerTray/18_2517ds