Thermofit Molded Parts Specification Control Drawing Limited Distribution

Part Number : 403A155-X-02

Description : Cable Breakout, 1 to 3

NOTES

1. All dimensions are in $\frac{\text{incnes}}{[\text{millimeters}]}$

- 2. Dimensions appearing in table are as follows:
 - a As Supplied
 - b After Unrestricted Recovery
- Coating is optional. As supplied dimensions appearing in table are for uncoated parts. When coating is added, entry diameters will be reduced by .06 max.

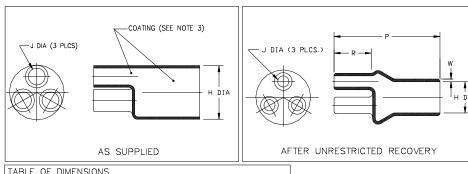


TABLE OF DIMENSIONS										
Н		J		Р	R	w				
Min	Max	Min	Max	±10%	Min	±20%				
a	ь	a	ь	ь	ь	ь				
2.76 [70,1]	1.40 [35,5]	1.80 [45,7]	.50 [12,7]	4.75 [120,6]	1.50 [38,1]	.12 [3,0]				
	H Min a 2.76	H Min Max a b 2.76 1.40	H J Min Max Min a b a 2.76 1.40 1.80	H J Min Max Min Max a b a b 2.76 1.40 1.80 .50	H J P Min Max Min Max ±10% a b a b b 2.76 1.40 1.80 .50 4.75	H J P R Min Max Min Max ±10% Min a b a b b b 2.76 1.40 1.80 .50 4.75 1.50				

If this document is printed it becomes uncontrolled. Check for the latest revision.

Raychem

RAYCHEM CORPORATION 300 CONSTITUTION DRIVE MENLO PARK, CALIFORNIA 94025

Revision : C

Part Number :

Part Number :

403A155-X-02

Date: 8/14/96


Description: Cable Breakout, 1 to 3

403A155-X-02

Description: Cable Breakout, 1 to 3

Thermofit Molded Parts Specification Control Drawing Limited Distribution

COMPATABILITY	CHART				
MATERIAL DASH NO.	MATERIAL DESCRIPTION	RT SPEC	COATING SLASH NO.	COATING S NO.	COATING DESCRIPTION
-3	Polyolefin, Semi-rigid	RT-301	/42; /86	S-1017;S-1048	Adhesive
-4	Polyolefin, Flexible	RT-1304	/42; /86	S-1017; S-1048	Adhesive
-25	Elastomer, Fluid Resistant	RT-1325	/86	S-1048	Adhesive



THIS DRAWING IS SUBJECT TO CHANGE WITHOUT NOTICE; CONSULT YOUR NEAREST FIELD REPRESENTATIVE FOR CURRENT REVISION

Raychem

RAYCHEM CORPORATION 300 CONSTITUTION DRIVE MENLO PARK, CALIFORNIA 94025

Revision: C Date: 8/14/96 Part Number : 403A155-X-02

Description : Cable Breakout, 1 to 3

CAD FILE MP96531